



## KIT ADMISSION DIRECTE DIRECT INDUCTION KIT

FIAT PALIO & SENIA

1.2L 75 HP multipoint injection

S.A.S

**Chrono'Sport**

122 rue du faubourg Saint Jean  
ZA de l'AVELON - 60000 BEAUVAIS -  
FRANCE



00.33.3.44.02.64.64



00.33.3.44.02.87.10

**Part n° :P325**

# FITTING INSTRUCTION

Remove the pipes A & B (See diagram A)

Fix the small green filter onto the oil vapor pipe.(see diagram B)

Fix the pipe of the kit onto the air flow meter (at the place of the pipe B (see diagram A)

then connect it to the small green filter with the connector provided.(see diagram B)

Screw the threaded bars provided to the air flow meter. (See diagram C)

the threaded bars must be screwed to the air flow meter (see diagram C)

Fix the green filter with the clamp to the air flow meter.

Fix the two large washers and the two nuts to the threaded bars.

**CAUTION THE FOLLOWING IS VERY IMPORTANT,**

**IT IS ABOUT THE TIGHTNESS AND THE LIFESPAN OF YOUR AIR FILTER**

- **Tightening method of the lock nuts:**




a) Tighten the nut until contact with the nut when you will be not able to turn the nut with your finger.

b) Tighten a quarter turn, **NOT MORE** .

c) Tighten the clamp.

The filter is now tight enough to have a tightness and not too much to damage it.

ANOTHER TIGHTENNING WILL BE USELESS

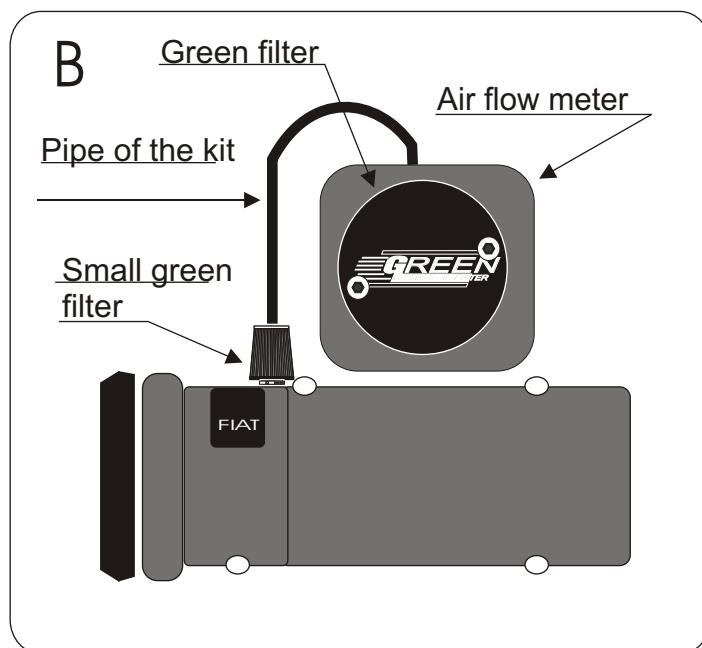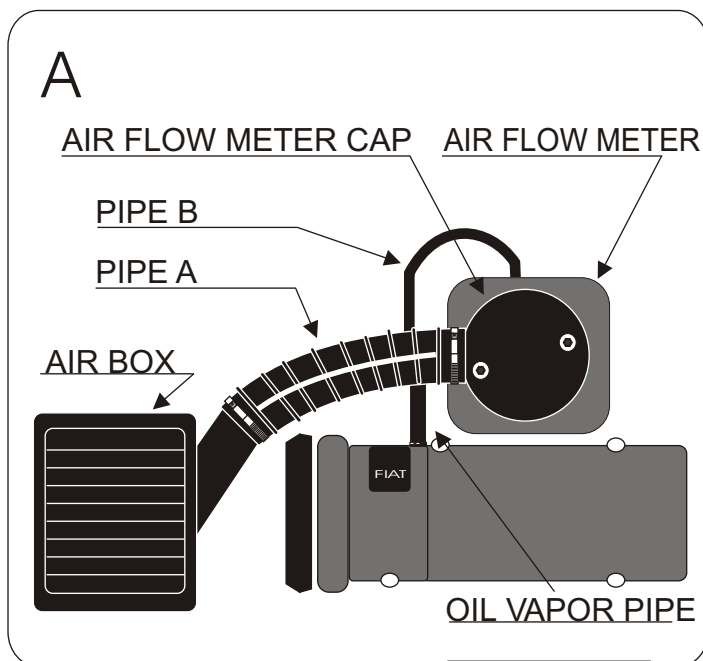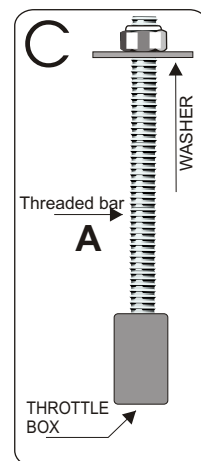

### IMPORTANT:

The running of your engine is linked directly with the maintenance of the air filter. Clean your air filter every 7000 kms or 4500 miles with Green cleaning products.

### WARRANTY:

The air filter guarantee is for defects in materials and workmanship only. Guarantee is void if the air filter is damaged by an accident, unreasonable use, neglect, misuse, abuse, improper installation or other causes not arising out of defects in materials and workmanship. The induction kit is a technical product so it is necessary to have some basic mechanical skills. If problems do not hesitate to have your induction kit fitted by a professional.

Green Technical dept : TEL: 00.33.3.44.02.64.64