

REMUS

 **REMUS**®
PERFORMANCE SPORT EXHAUSTS

NEW DEVELOPMENT 2023 | #09



Subaru BRZ, Type Z2 04/23=>
2.4l 172 kW (FA24, with GPF)

AXLE-BACK-SYSTEM EC APPROVED

POWER	TORQUE	WEIGHT
+ 11.2 HP	+ 13.2 NM	-5.6KG
@ 6000 rpm	@ 6000 rpm	

GPF-BACK-SYSTEM RACING

POWER	TORQUE	WEIGHT
+ 16.4 HP	+ 19.4 NM	-12.5KG
@ 6000 rpm	@ 6000 rpm	

AVAILABLE FOR ORDER NOW
(READY FOR DELIVERY IN CALENDAR WEEK 42)

REMUS

Subaru BRZ, Type Z2 04/23=>

2.4l 172 kW (FA24, with GPF)

ABOUT

Axle-back-system centered for L/R: 900023 1500 + tail pipe set! No vehicle modifications required!

RACING GPF-back-system centered L/R: 900023 1300 (No EC type approval) + 900023 1500 + tail pipe set! No vehicle modifications required!

The use of racing products and products that do not have EC approval is not permitted on public roads.

When installing REMUS sports silencers, cat-back systems and cat replacement pipes designed for use on closed tracks, it is advantageous to carry out an ECU remapping in order to exploit the optimum performance of the exhaust system and to prevent any illumination of the engine control light.

When using the GPF replacement pipe, the lambda probes must be unplugged and stripped. No blind connections available! In addition, when installing the optional GPF replacement tube, the GPF must be deactivated in the engine control unit or the engine control unit must be reprogrammed (ECU remapping), otherwise the engine control light will illuminate. A better performance as well as throttle response is also achieved by this!

900023 1300

Non resonated Racing GPF-back section
only mountable in combination with REMUS sport exhaust
incl. mounting material
Connection to front parts at the manufacturer connection point
Installation/fitting at the serial mounting points
Original tube Ø 60 mm - REMUS tube Ø 60 mm
No EC type approval

182,-

900023 1500

Sport exhaust centered (absorption principle) for L/R system
incl. mounting material
Connection to front parts at the manufacturer connection point
Installation/fitting at the serial mounting points
Original tube Ø 60 mm - REMUS tube Ø 60 mm incl. EC type approval

615,-




0426 85SR

Stainless steel tail pipe set

2 tail pipes Ø 127 mm angled/angled,
chromed, with adjustable spherical
clamp connection

310,-

Subaru BRZ, Type Z2 04/23=> 2.4l 172 kW (FA24, with GPF)

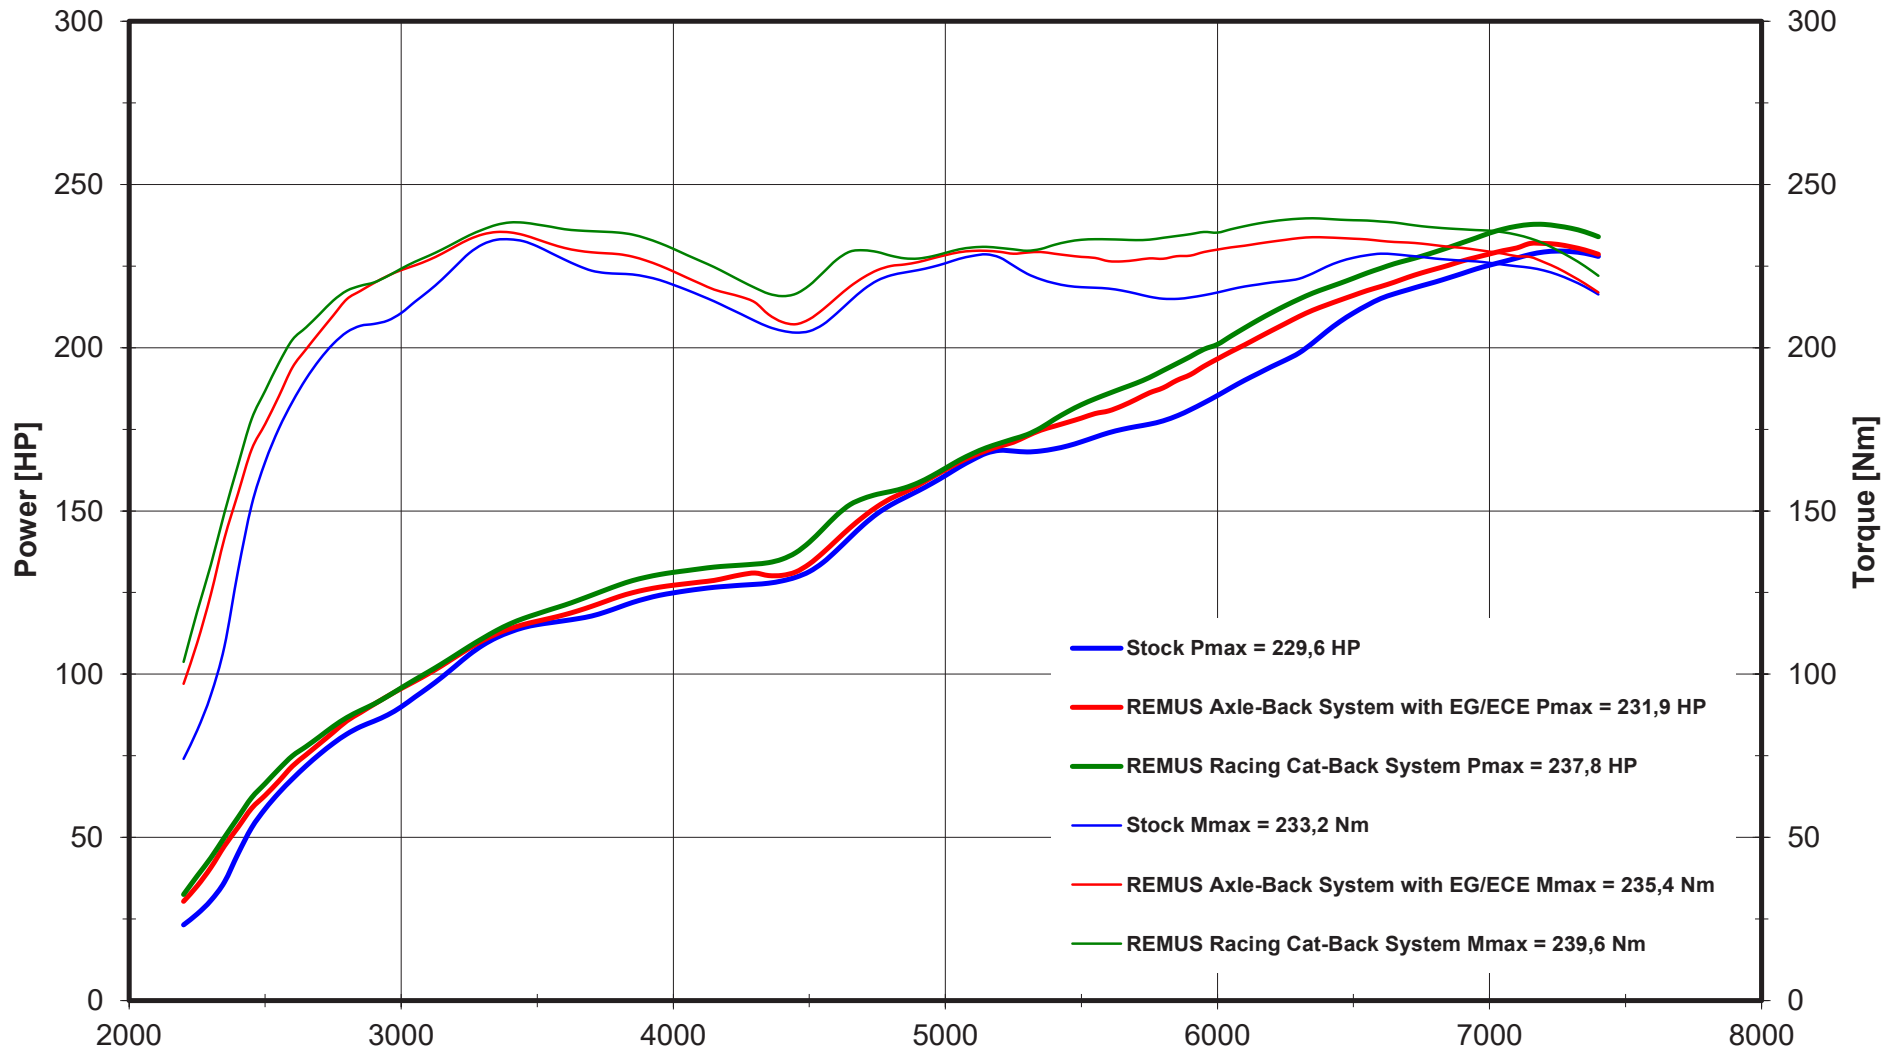

THE SOUND OF **REMUS**®

FIRST CLASS QUALITY DESIGNED & BUILT IN EUROPE | AUSTRIA

web: remus.eu

 [remus.sportexhaust](https://www.instagram.com/remus.sportexhaust)

 **REMUS Innovation GmbH**
Ruhmannstraße 11
A-8570 Voitsberg